


DATA SHEET

Insulated mast for GTI H-9000mm Type II cable

Product code

569019

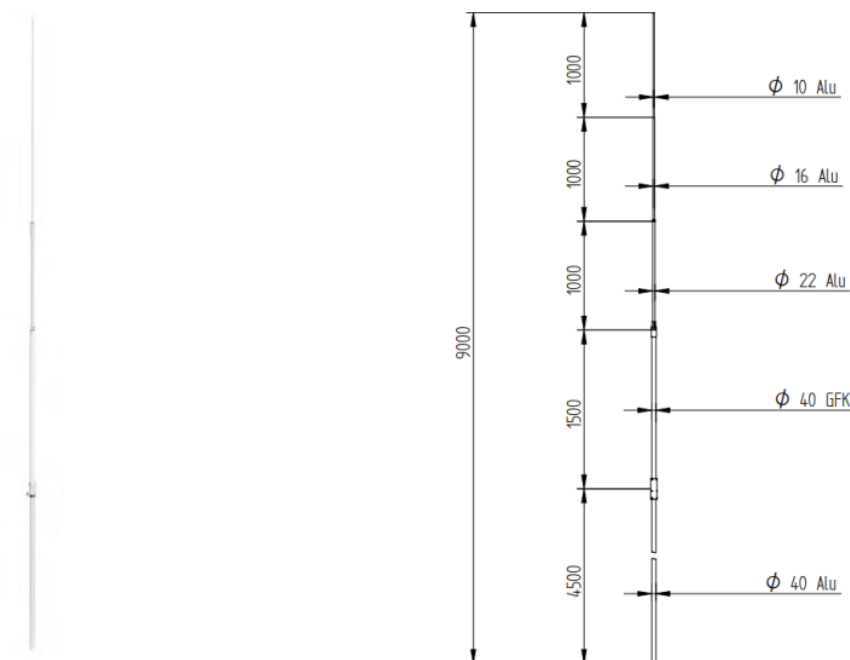

Technical description

Insulated lightning protection mast designed to protect rooftop equipment against direct lightning strikes. A conductor must be routed inside the mast to maintain the required separation distance. The set includes the lightning protection mast with a GRP pipe, a threaded terminal for the conductor, and connection components (bolts, GBS clamps). The insulated conductor must be ordered separately. Wind load resistance complies with the PN-EN 1993-1-1 and PN-EN 1999-1-1 Eurocode standards. The mast is mounted using system holders or a tripod base with concrete bases.

Technical data

Material	GRP; Stainless Steel; Aluminium
Weight (1 unit)	7,8 kg
In accordance with the standard	EN 62305
Meets the requirements of the standard	EN 62561-8
Ean code	5906293202372
Customs code	74111010

Due to continuous technological development, the company reserves the right to change the technical parameters of the products.
The illustrations shown are not binding.