GROMTOR Sp. z o o.
Lightning protection systems
st. Zacisze 3, 55-010 Groblice

DATA SHEET

Isolated air-termination mast H-7500mm for GTI conductor

Product code

597519

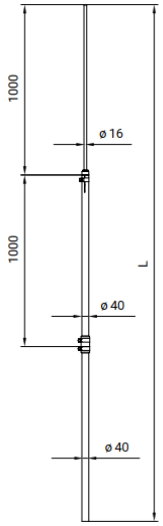

Technical description

A high-voltage lightning protection mast designed to protect rooftop equipment from direct lightning strikes. A conductor ensuring the required insulation clearance must be routed through the center of the mast. The kit includes a lightning protection mast with a GFK tube, a threaded connector for the conductor, and fasteners (screws, GBS clamps). The insulated conductor must be ordered separately. Wind load resistance in accordance with PN-EN 1993-1-1 and PN-EN 1999-1-1 (Eurocode), wind load standards. The mast is mounted on system holders or a tripod with concrete bases.

Technical data

Material	GRP; Stainless Steel; Aluminium
Weight (1 unit)	8,7 kg
In accordance with the standard	EN 62305
Meets the requirements of the standard	EN 62561-8
Ean code	5903699806678
Customs code	74111010

Due to continuous technological development, the company reserves the right to change the technical parameters of the products.
The illustrations shown are not binding.