


DATA SHEET

Isolated air-termination mast H-8500mm for GTI conductor

Product code

598519

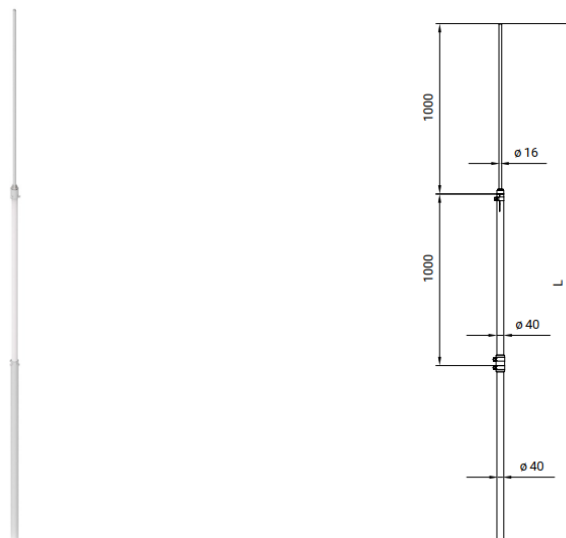

Technical description

A high-voltage lightning protection mast designed to protect rooftop equipment from direct lightning strikes. A conductor ensuring the required insulation clearance must be routed through the center of the mast. The kit includes a lightning protection mast with a GFK tube, a threaded connector for the conductor, and fasteners (screws, GBS clamps). The insulated conductor must be ordered separately. Wind load resistance in accordance with PN-EN 1993-1-1 and PN-EN 1999-1-1 (Eurocode), wind load standards. The mast is mounted on system holders or a tripod with concrete bases.

Technical data

Material	GRP; Aluminium; Stainless Steel
Weight (1 unit)	0,08 kg
In accordance with the standard	EN 62305
Meets the requirements of the standard	EN 62561-8
Ean code	5903699800478
Customs code	85354000

Due to continuous technological development, the company reserves the right to change the technical parameters of the products.
The illustrations shown are not binding.